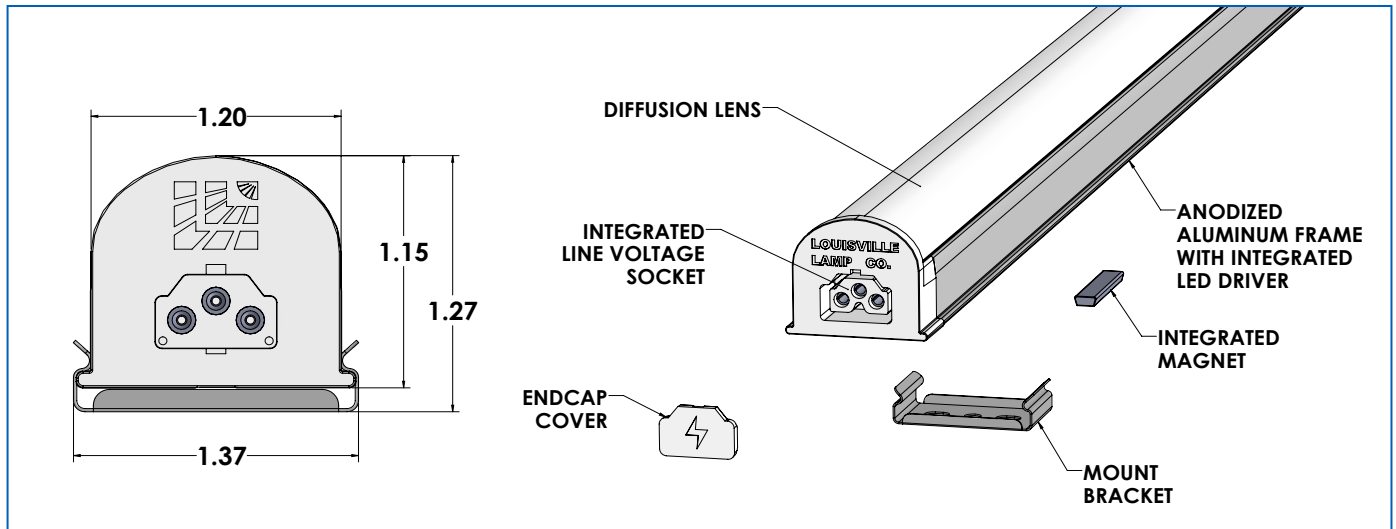


DRAWINGS



SPECIFICATIONS

Nominal LENGTH	12"	22"	34"	46"
Actual LENGTH	10.9"	21.2"	33.0"	44.8"
Output Wattage (W)	18W	30W	48W	60W
Output Lumens (lm)	2,000	4,000	6,000	8,000
Output Max # Fixtures	15	15	10	10
Diode Efficacy (lm/W)	100-120			
Module Outside Dims (W x H)	1.20" x 1.15"			
Color Temps (K)	3000K, 4000K, 6000K			
Certifications	UL			
LED Beam Angle	120°			
Module Input Voltage	120 VAC, 60Hz			
Mounting Method	Bracket, Magnet			
Wiring Specs	18AWG X 3C SVT VW-1			
Connector Specs	Friction Quick Disconnect			
Environment	Indoor, Dry			


FEATURES

- Extraordinary high-output performance - 4X to 5X more lumens than most linear LED fixtures
- Low profile - Less than 1 1/4" fixture height
- Long-range optics ideal for many retail applications
- Nominal sizes: 12", 22", 34", 46"
- Aluminum extruded frame
- Integrated Low Voltage Power Supply
- Excellent color rendering
- Easy LED retrofit option for T5HO Fluorescent options
- Protective diffusion lens
- Easy installation
- Modular connector system


ORDERING INFORMATION

FIXTURE ORDERING INFORMATION						POWER/CONNECTOR CORD ORDERING INFORMATION													
iSHO	-	LED	34	-	60	FR	-	000	MT5	-	CC	-	N	U	-	012	003	-	---
Model		LED Fixture	Normal Length		Lamp (Kelvin)	Lens & Lamp Type		Options	Model		Cord Type		Connector Type	Connector Orientation		Cord Length	# of Connectors		Options
iSHO		LED	12" 22" 34" 46"		60= 6000K 30= 3000K 41= 4100K	FR= Frost Lens CL= Clear Lens		Consult factory for options	MT5		CC= Connector Cord PC= Power Cord		N=Ninety Degree S= Straight	U=Up D=Down S= Straight		003=3" 006=6" 012=12" 024=24" 036=36" 072=72"	003= 3 cond		Blank= None SW= Inline Switch Consult factory for options
Example: iSHO-LED34-60FR-000									Example: MT5-CC-NU-012-003										




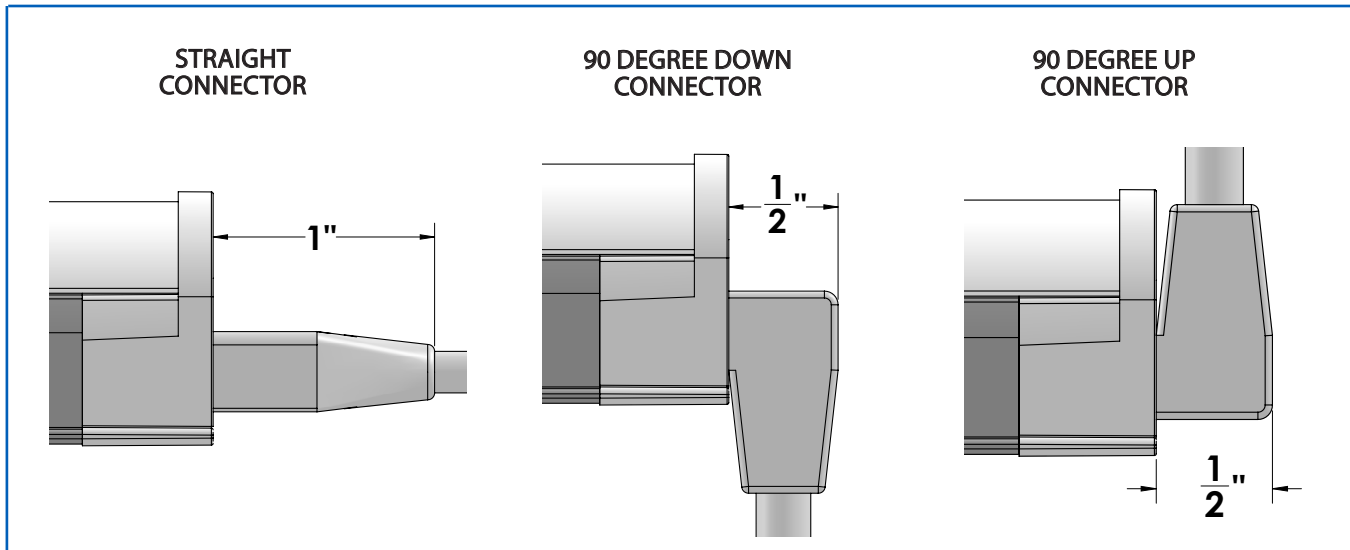
CONNECTOR CORD OPTIONS



SAMPLE APPLICATION LAYOUTS

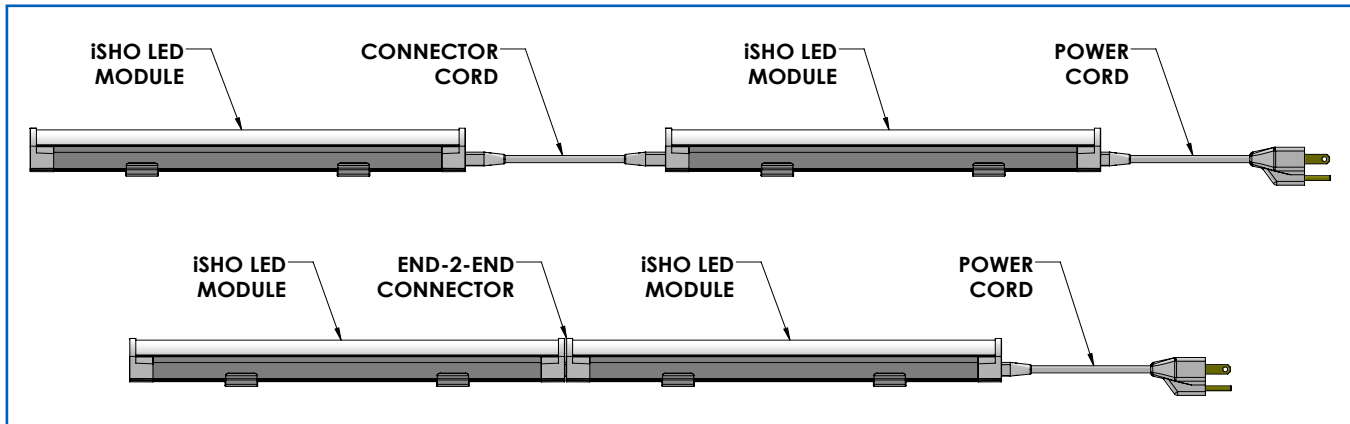

MOUNTING OPTIONS

Standard Mount (iSHO-MC-000)	90° Elbow Mount (iSHO-MC-001)	90° Elbow Mount with Magnet (iSHO-MC-002)	Standard Mount with Integrated Magnets
(1) Standard Bracket, (1) Screw	(1) 90° Elbow, (1) Standard Bracket, (1) Screw	(1) 90° Elbow, (1) Standard Bracket, (1) Magnet	(2) Integrated Magnets
			

RELATED ACCESSORIES

MT5-EC-PLUG	End Cap Plug
MT5-EC-E2EC	End-2-End Connector

Note: A standard fixture includes (2) MT5-MC000 brackets, (2) screws, and (1) End-2-End connector

iSHO LED LINEAR

